



Dual interval technology



Rear display



Battery operation

SW SERIES

Smart Weighing Scale

Compact Design and easy to use, suitable for multipurpose environments where light weight & portable scales are needed.

- **Trade approved (NMI No. 6/4C/260)**
- Battery Operation
- 25mm LCD Display
- Auto power-off function



◀ SW-1W (IP66: Dust & Washdown)



▼ SW-1C (Counting & Limit Function)

SW-1W | Smart Weighing Scale



SPECIFICATIONS

| Model | SW-1W | | | | |
|---------------------|---|--------|--------|--------|---------|
| Max. Capacity (kg) | 1/2 | 2.5/5 | 4/10 | 10/20 | 15/30 |
| Readability (g) | 0.5/1 | 1/2 | 2/5 | 5/10 | 5/10 |
| Max. Tare (kg) | -0.9995 | -2.499 | -3.998 | -9.995 | -14.995 |
| Internal Resolution | 1/60,000 | | | | |
| External Resolution | 1/2,000 ~ 1/3,000 (Dual Interval) | | | | |
| Display Digit | 5 Digits | | | | |
| Display Type | LCD (dual display) | | | | |
| Operating Temp. | -10°C ~ 40°C | | | | |
| Power | Dry Battery (6 x D type), 9V DC Adapter | | | | |
| Battery Life | Approx. 400hrs or 800hrs (Alkaline battery) | | | | |
| Platter Size (mm) | 247(W) x 195(D) | | | | |
| Dimensions (mm) | 278(W) x 317(D) x 141(H) | | | | |
| Product Weight (kg) | 3.7 | | | | |

1/2,000~1/3,000 dual interval resolution for better accuracy

The SW-1W adopts dual interval technology, allowing for an automatic change of the SW-1W interval for an even more precise reading.



Dust & Waterproof digital scale (Level IP 66)

The SW-1W is protected from water, dirt and other external agents.



Clear and Highly legible LCD displays (Dual Display)


SW-1W Series has a 25mm large LCD display and uses 5 highly legible digits. Also features a Rear Display for clients to view.



Used anywhere with battery power

SW Series is operated by an AC adapter or alkaline batteries.


Its compact design is great for use anywhere.



DIMENSIONS

SW-1W

Unit:mm

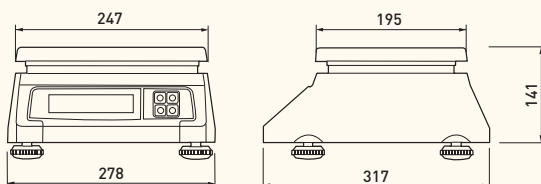

OPTIONS

- 9V DC adapter
- Fish tray

Fish tray



Adapter can be different for each country



SW-1C | Smart Weighing Scales



SPECIFICATIONS

| Model | SW- 1C | | | | |
|---------------------|---|--------|--------|--------|---------|
| Max. Capacity (kg) | 1/2 | 2.5/5 | 4/10 | 10/20 | 15/30 |
| Readability (g) | 0.5/1 | 1/2 | 2/5 | 5/10 | 5/10 |
| Max. Tare (kg) | -0.9995 | -2.499 | -3.998 | -9.995 | -14.995 |
| Internal Resolution | 1/60,000 | | | | |
| External Resolution | 1/2,000 ~ 1/3,000 (Dual Interval) | | | | |
| Display Digit | 5 Digits | | | | |
| Display Type | LCD | | | | |
| Operating Temp. | -10°C ~ 40°C | | | | |
| Power | Dry Battery (6 x D type), 9V DC Adapter Rechargeable Battery | | | | |
| Battery Life | Approx. 400hrs or 800hrs (Alkaline battery) | | | | |
| Platter Size (mm) | 230(W) x 190(D) | | | | |
| Dimensions (mm) | 260(W) x 287(D) x 137(H) | | | | |
| Product Weight (kg) | 2.8 | | | | |

1/2,000~1/3,000 dual interval resolution for better accuracy

The SW-1C adopts dual interval technology, allowing for an automatic change of the SW-1C interval for an even more precise reading.



Clear and Highly legible LCD displays (Dual Display)

SW-1W Series has a 25mm large LCD display and uses 5 highly legible digits. Also features a Rear Display for clients to view.



Accurate counting function (SW-1C only)


The SW-1C has a simple counting and limit function for quality product management. It is great for use in manufacturing, parts shops, hardware stores etc.



Used anywhere with battery power

SW Series is operated by an AC adapter or alkaline batteries.


Its compact design is great for use anywhere.



DIMENSIONS

SW-1C

Unit:mm

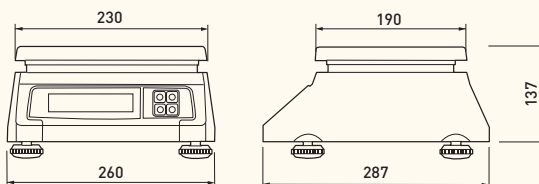

Features

- Dust protection cover

OPTIONS

- AC adapter (9V/300mA)
- Stainless steel platter
- Fish tray



Fish tray



Stainless steel platter

TOTAL WEIGHING SOLUTION™

WE WEIGH THE WORLD™

CAS

UNIT 8, NORTHLINK, 459 TUFNELL ROAD
BANYO QLD 4014, AUSTRALIA

TEL_ +61 7 3267 7767 FAX_ +61 7 3267 1818

EMAIL_ sales@casscale.com.au

www.casscale.com.au

Specifications are subject to change for improvement without prior notice.