

SRP-350III

3 inch POS printer



Retail



Hospitality




Ticketing



Kiosk

The Industry's **steady seller**

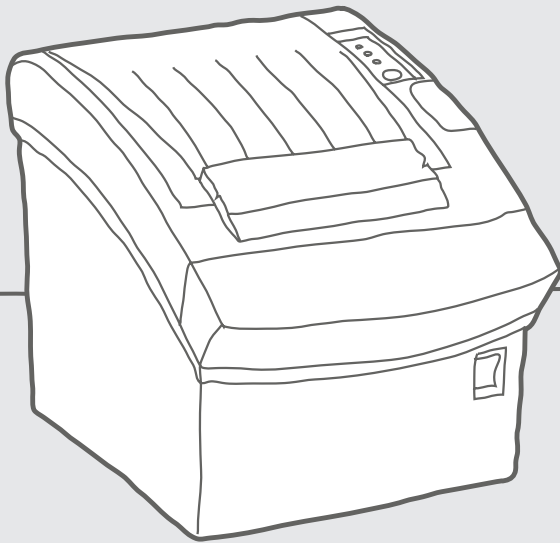

Powerful Printing Performance

- Fast printing up to 250mm/sec (25% faster than the SRP-350II)
- 4-type dithering options for graphic printing
- A family of the world-class SRP-350 line



Multiple interface choice

- Built-in USB with a choice of Serial, Parallel, or Ethernet



User-friendly Design

- Anti-jam guide
- Stand-alone or Space-saving wall-mount use
- 2" or 3" paper choice

SRP-350III

3 inch POS printer

Specifications

Print Characteristics

Print Method

Direct Thermal

Print Speed

SRP-350III: Up to 250 mm/sec
SRP-352III: Up to 230 mm/sec

Print Resolution

SRP-350III: 180 dpi
SRP-352III: 203 dpi

Print Width

Up to 72 mm

Sensor

Paper End, Paper Near End, Cover Open

Media Characteristics

Media Type

Receipt

Media Width

80 mm
Optional 58 mm (with 2 inch Partition)

Media Roll Diameter

Up to 83 mm

Media Thickness

0.062 ~ 0.075 mm

Supply Method

Easy Paper Loading

Physical Characteristics

Dimensions (W x L x D)

145 x 204 x 146 mm
(5.70 x 8.03 x 5.74 inch)

Weight

1.55kg (3.41 lbs)

Power

EnergyStar Certified,
External Power Adaptor 100-240V AV, 50/60Hz

Drawer Port

2 ports (via y-type adaptor)

Performance Characteristics

Memory

64 Mbit SDRAM, 32 Mbit FlashROM

NV Image Memory

256 Kbytes (mono)

Receive Buffer

4 Kbytes

User Define Buffer

12 Kbytes

Interface

- ① USB V2.0 FS + Serial
- ② USB V2.0 FS + Parallel
- ③ USB V2.0 FS + Ethernet

Environment Characteristics

Temperature

Operating: 0 ~ 40°C (32 ~ 104°F)
Storage: -20 ~ 60°C (-4 ~ 140°F)

Humidity

Operating: 10 ~ 80% RH
Storage: 10 ~ 90% RH

Reliability

Printer Unit (MCBF)

70 Million Lines

Thermal Print Head (TPH)

150 km

Auto Cutter

1.8 Million Cuts

Software

Emulation

BXL / POS

Driver / Utility

Windows Driver, OPOS Driver, JPOS Driver,
Linux CUPS Driver, Mac Driver,
Virtual COM USB / Ethernet Driver, Utility Program

SDK

iOS SDK, Android SDK

Fonts / Graphics / Symbologies

Character Size

Font A: 12 x 24 Font B: 9 x 17 Font C: 9 x 24
KOR, CHN, JPN: 24 x 24

Characters Per Line

SRP-350III: Font A: 42 Font B, C: 56
KOR, CHN, JPN: 21

SRP-352III: Font A: 48 Font B, C: 64
KOR, CHN, JPN: 24

Character Sets

Alphanumeric: 95
Extended Graphics: 128 x 33 page
International: 32

Graphics

Supporting user-defined fonts, graphics,
formats, and logos

Barcode Symbologies

1D: Codabar, Code 39, Code 93, Code 128,
EAN-8, EAN-13, ITF, UPC-A, UPC-E

2D: Data Matrix, PDF417, QR code

